


eKINO-BT

Mini-ITX SBC supports AUPS Sub-System, Intel® 22nm Atom™/Celeron® on-board SoC, Wide-range 9V ~ 26V DC input, VGA/ Dual LVDS, SATA, Dual GbE, USB 3.0, Audio, CFast and RoHS

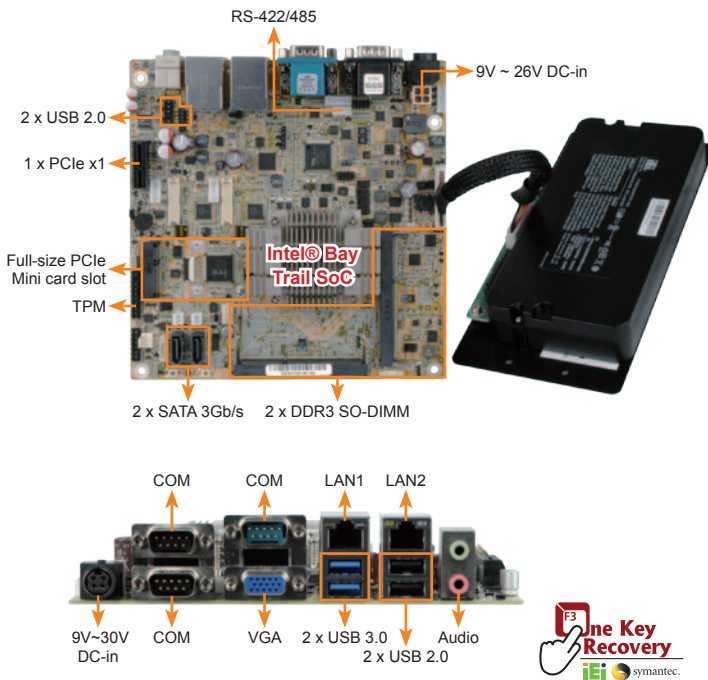

Specifications

- CPU**
 - Intel® Atom™ E3845 on-board SoC (1.91GHz, quad-core, 2MB cache, TDP=10W)
 - Intel® Atom™ E3827 on-board SoC (1.75GHz, dual-core, 1MB cache, TDP=8W)
 - Intel® Atom™ E3826 on-board SoC (1.46GHz, dual-core, 1MB cache, TDP=7W)
 - Intel® Atom™ E3825 on-board SoC (1.33GHz, dual-core, 1MB cache, TDP=6W)
 - Intel® Atom™ E3815 on-board SoC (1.46GHz, single-core, 512KB cache, TDP=5W)
 - Intel® Celeron® J1900 on-board SoC (2GHz, quad-core, 2MB cache, TDP=10W)
 - Intel® Celeron® N2930 on-board SoC (1.83GHz, quad-core, 2MB cache, TDP=7.5W)
 - Intel® Celeron® N2807 on-board SoC (1.58GHz, dual-core, 2MB cache, TDP=4.3W)
- BIOS**
 - AMI UEFI BIOS
- Memory**
 - Two 204-pin 1066/1333MHz dual-channel unbuffered DDR3L SDRAM SO-DIMM supports up to 8 GB (J1900, N2930, E3845, E3827, E3826) or 4 GB (N2807, E3825, E3815)
- Graphics Engine**
 - Intel® HD Graphics Gen 7 Engines with 4 execution units, supporting DX11.1, OpenGL 4.2 and OpenCL1.2
- Display Output**
 - VGA (up to 2560x1600@60Hz)
 - LVDS1: 18/24-bit dual-channel LVDS by CH7511B DP to LVDS converter (up to 1920x1200@60Hz)
 - LVDS2: 18/24-bit dual-channel LVDS by CH7511B DP to LVDS converter (up to 1920x1200@60Hz)
- Ethernet**
 - Dual LAN: Realtek RTL8111E PCIe controller
- I/O Interfaces**
 - 4 x RS-232 1 x RS-422/485
 - 1 x CFAST slot 2 x SATA with 5V output
 - 4 x USB 2.0 (2 on rear IO, 2 by pin header)
 - 2 x USB 3.0 (rear IO)
 - 1 x 6-pin header for KB/MS
- Super IO**
 - F81866D-I
- TPM**
 - 1 x TPM connector (2x10 pin)
- SMBus**
 - 1 x 4-pin wafer
- I2C**
 - 1 x 4-pin wafer
- microSD**
 - 1 x microSD slot (E38XX SKU only)
- Front Panel**
 - 1 x Front panel connector (power LED, HDD LED, speaker, power button, reset button)
- LAN LED**
 - 2 x 2-pin headers for LAN1 Link LED, LAN2 Link LED
- Digital I/O**
 - 8-bit digital I/O (4-bit input, 4-bit output)
- Expansion**
 - 1 x Full-size PCIe Mini card slot (with USB 2.0)
 - 1 x PCIe x1
- Audio**
 - Realtek ALC662 HD codec
 - 2 x Audio jacks (rear I/O)
 - Front audio: 1 x 10-pin header
- Watchdog Timer**
 - Software programmable supports 1~255 sec. system reset by super I/O
- Power Supply**
 - Input voltage range: 9V ~ 26V
 - Recommended operating input voltage range: 12V~24V
 - 1 x External 4-pin DIN DC jack
 - 1 x Internal 4-pin (2x2) power connector
- Fan Connector**
 - 1 x 4-pin smart fan
 - 1 x 3-pin system fan
- Power Consumption**
 - +12V @1.55A (Intel® Celeron® J1900 CPU, 2 x 4GB 1333 MHz DDR3L memory)
- Operating Temperature**
 - 0°C ~ 40°C with AUPS sub-system
 - 20°C ~ 60°C without AUPS sub-system
- Storage Temperature**
 - 10°C ~ 50°C with AUPS sub-system
 - 30°C ~ 70°C without AUPS sub-system
- Operating Humidity**
 - 5% ~ 95%, non-condensing
- Weight**
 - GW: 1100g/NW: 400g

Features

- Mini ITX supports Intel® 22nm Atom™ or Celeron® on-board SoC
- Wide-range 9V ~ 26V DC input design
- Supports dual independent display with dual LVDS and VGA
- Equipped with AUPS sub-system, acts as a simple UPS system
- Supports four USB 2.0, two USB 3.0, two SATA and four COM
- IEI jumper-less function



Packing List

1 x eKINO-BT single board computer	
2 x SATA with 5V output cable kit (P/N: 32801-000201-300-RS)	
1 x I/O shielding	
1 x QIG	1 x Utility CD

Ordering Information

Part No.	Description
EKINO-BT-J19001-R10	Mini-ITX SBC supports AUPS Sub-System, Intel® Celeron® quad-core processor J1900 (10W), Wide-range 9V ~ 26V DC input, VGA/dual LVDS, SATA, Dual GbE, USB 3.0, Audio, CFAST and RoHS
EKINO-BT-N29301-R10	Mini-ITX SBC supports AUPS Sub-System, Intel® Celeron® quad-core processor N2930 (7.5W), Wide-range 9V ~ 26V DC input, VGA/dual LVDS, SATA, Dual GbE, USB 3.0, Audio, CFAST and RoHS
EKINO-BT-N28071-R10	Mini-ITX SBC supports AUPS Sub-System, Intel® Celeron® dual-core processor N2807 (4.3W), Wide-range 9V ~ 26V DC input, VGA/dual LVDS, SATA, Dual GbE, USB 3.0, Audio, CFAST and RoHS
EKINO-BT-E38XX1-R10**	Mini-ITX SBC supports AUPS Sub-System, Intel® Atom™ E38XX on-board SoC, Wide-range 9V ~ 26V DC input, VGA/dual LVDS, SATA, Dual GbE, USB 3.0, Audio, CFAST and RoHS (by request MOQ: 100pcs/lot)
BATKIT-2S2P3800-R10	2S2P 7.4V 3800mAh AUPS battery kit
BAT-LI-2S2P3800	2S2P 7.4V 3800mAh smart battery
BATKIT-4S2P3800-R10	4S2P 14.8V 3800mAh AUPS battery kit
BAT-LI-4S2P3800	4S2P 14.8V 3800mAh smart battery
CB-USB02A-RS	Dual ports USB cable with bracket, with 2.0mm
32000-070301-RS	Dual ports USB cable, with 2.0mm
32006-000300-100-RS	PS/2 KB/MS Y-cable without bracket
32205-003800-300-RS	RS-422/485 cable
63000-FSP0601AD101C746-RS	60W/12V power adaptor, 90VAC~260VAC, 4-pin DIN
63000-FSP120AAB-RS	120W/19V power adaptor, 90VAC~264VAC, 4-pin DIN

** : Those item are by order production, MOQ: 100

AUPS Battery Kit

• BATKIT-2S2P3800-R10

• BATKIT-4S2P3800-R10



P/N: BAT-LI-2S2P3800
2S2P 7.4V 3800mAh

P/N: BAT-LI-4S2P3800
4S2P 14.8V 3800mAh

Battery Specifications

Battery Model	BAT-LI-2S2P3800	BAT-LI-4S2P3800
Battery type	Li-Ion 2S2P 7.4V	Li-Ion 4S2P 14.8V
Battery capacity	7.4V 3800mAh	14.8V, 3800mAh
Maximum charge voltage	8.4V	16.8V
The end of discharging voltage	5.6V	11.2V
Battery charge time (Power off)	2.5hrs	5hrs
Battery charge time (Power on)	6.5hrs	13hrs
Operating temp.	0°C ~ 40°C	0°C ~ 40°C
Storage temp.	-20°C ~ 60°C	-20°C ~ 60°C
Cycle life	300 charge/discharge cycles	
Backup	60W/10Min	100W/10Min
Safety class	CE	