


ACE-A622A/B 220W 1U Type ATX Power Supply



Dimensions (Unit: mm)

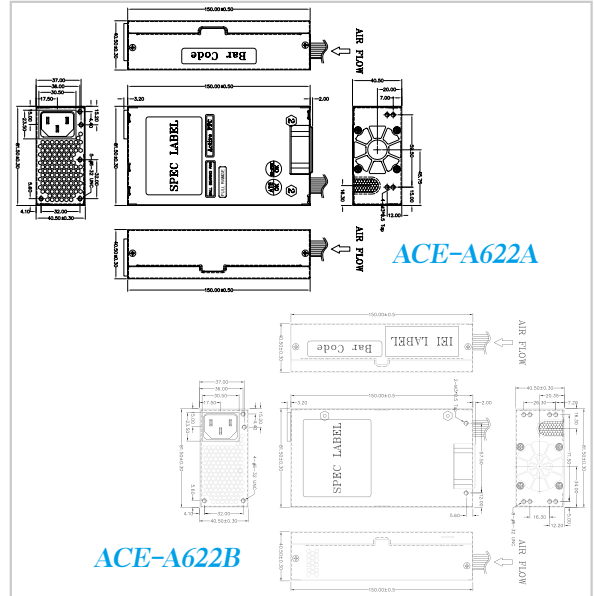

Specifications

Input Type	90~264 VAC Full Range						
Output Voltage		+3.3 V	+5 V	+12 V	+12 V 2	-12 V	+5 Vsb
	ACE-A622A	14 A (0.5 A min.)	16 A (0.5 A min.)	16 A (1 A min.)	10 A (1 A min.)	0.8 A (0 A min.)	2.5 A (0 A min.)
	ACE-A622B	10.0A (0.1 A min.)	14.0A (0.2 A min.)	14.0A (0.6 A min.)		0.3A	2.5A
Efficiency	ACE-A622A: 80% / ACE-A622B: 85%						
Temperature	Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C						
MTBF (hrs)	100,000 hr						
Output Connector	ACE-A622A	20-pin ATX, 4-pin 12 V, three HDD and one FDD					
	ACE-A622B	20+4-pin ATX, 4-pin 12V CPU, 1x FDD, 2 x HDD, 2 x SATA					
Dimensions	150 x 81.5 x 40.5 (mm)						


Ordering Information

Part No.	Description
ACE-A622A-RS-R11	220W AC-DC 1U flex ATX Power Supply, with PFC/ErP, meet 80 PLUS
ACE-A622B-RS-R10	1U flex ATX 220W Power Supply, 90~264VAC, ErP, CCL, RoHS

ACE-A618A/B 180W 1U Type ATX Power Supply



Dimensions (Unit: mm)

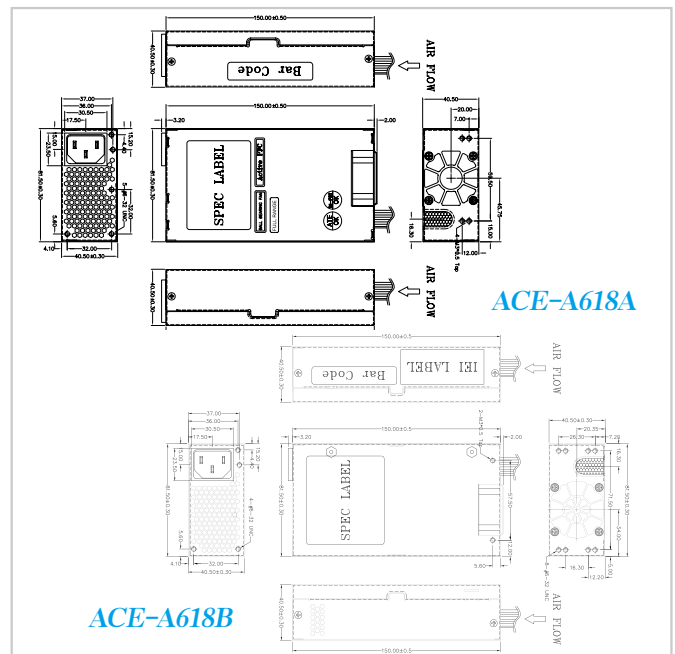

Specifications

Input Type	90~264 VAC Full Range					
Output Voltage		+3.3 V	+5 V	+12 V	-12 V	+5 Vsb
	ACE-A618A	14 A (0.3 A min.)	16 A (0.3 A min.)	14 A (1.5 A min.)	0.5 A (0 A min.)	2.0 A (0 A min.)
	ACE-A618B	10.0A (0.1 A min.)	14.0A (0.2 A min.)	10.0A (0.6 A min.)	0.3 A	2.5 A
Efficiency	ACE-A618A: 80% / ACE-A618B: 85%					
Temperature	Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C					
MTBF (hrs)	100,000 hr					
Output Connector	ACE-A618A	20-pin ATX, 4-pin 12 V, three HDD and one FDD				
	ACE-A618B	20+4-pin ATX, 4-pin 12V CPU, 1x FDD, 2 x HDD, 2 x SATA				
Dimensions	150 x 81.5 x 40.5 (mm)					

Ordering Information

Part No.	Description
ACE-A618A-RS-R11	180WAC-DC 1U flex ATX Power Supply, with PFC/ErP
ACE-A618B-RS-R10	1U flex ATX 180W Power Supply, 90~264VAC, ErP, CCL, RoHS