


ACE-716C

150 W 24V DC input AT Power Supply



Input Type	19 ~ 30 VDC				
Output Voltage	+5 V	+12 V	-5 V	-12 V	+24 V
	18 A (2 A min)	4 A	0.5 A	1 A	
Efficiency	70%				
Temperature	Operating: -20°C ~ 70°C (50°C ~ 70°C derating curve) Storage: -20°C ~ 85°C				
MTBF (hrs)	210,000				
Output Connector	Optional Cable				
Dimensions	198 x 97 x 40.5 mm				

Dimensions (Unit: mm)

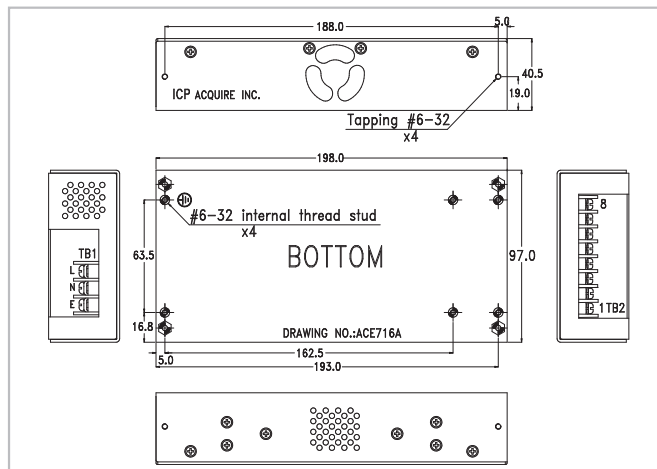

Output terminal block connectors

Pin 1, 2	Pin 3, 4	Pin 5	Pin 6	Pin7	Pin8
5 V	GND	-5 V	-12 V	GND	+12 V

Ordering Information

Part No.	Description
ACE-716C-RS	150 W 24 V DC input AT Power Supply

Option 1	Embedded Solution	Option 2	AT P8P9 Backplane Solution
	PN: CB-716EB-RS 30 cm DC cable to CPU card with 4-pin 12 V CPU, HDD and SATA connectors		PN: CB-716P8P9-RS 30 cm DC cable AT power to P8P9 with HDD and SATA connectors

2U AC Input ATX Type

ACE-D825A

252 W Flex Power Supply




ACE-D825A-H:
Rubber sleeve exterior ideal for desktop applications, such as AC-DC power adaptor.

ACE-D825A

Specifications

Input Type	90~264 VAC Full Range	
Output Voltage	+12 V	+24 V
	15.0 A (1.0 A min.)	3 A (0.0A min.) peak load 8 A
Efficiency	80%	
Temperature	Operating: 0°C ~ 50°C Storage: -20°C ~ 80°C	
MTBF (hrs)	100,000	
Output Connector	1 x 5-pin molex 39-01-2100 1 x 4-pin power mini-DIN for +12 VC 1 x 3-pin power mini-DIN for +24 VDC	
Dimensions	140 x 150 x 86 (mm)	

Dimensions (Unit: mm)

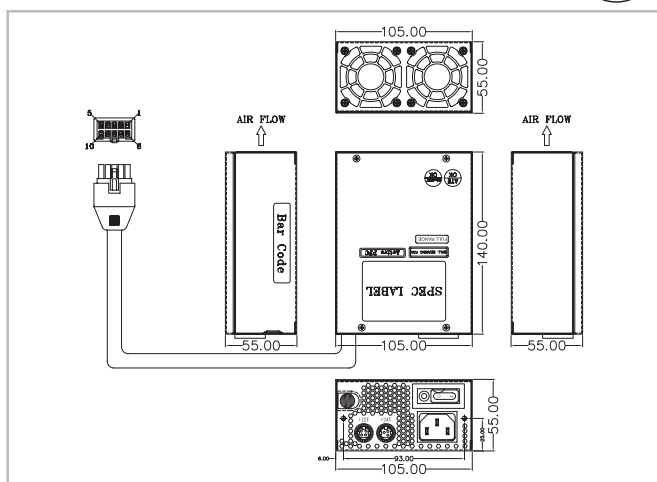

Output Pin Definitions

