


ACE-A615A/B 150W 1U Type ATX Power Supply



Dimensions (Unit: mm)

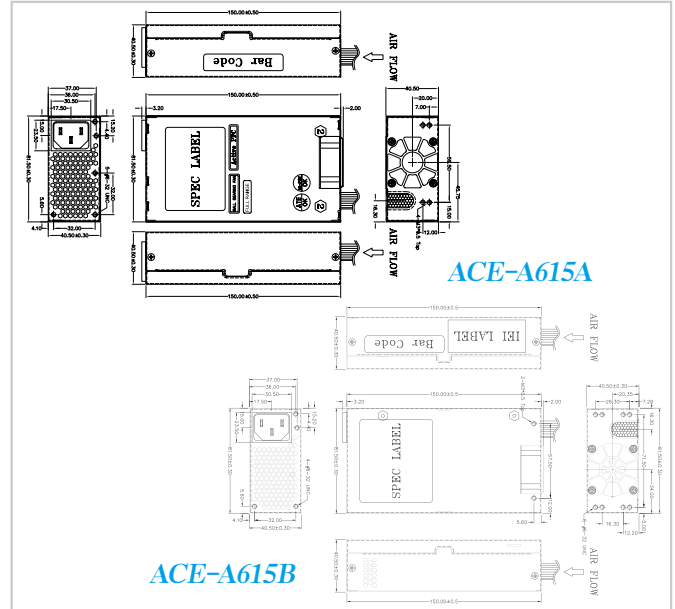

Specifications

Input Type	90~264 VAC Full Range					
Output Voltage	ACE-A615A	+3.3 V 10 A (0.3 A min.)	+5 V 13 A (0.3 A min.)	+12 V 10 A (1 A min.)	-12 V 0.5 A (0 A min.)	+5 Vsb 2.0 A (0 A min.)
	ACE-A615B	10.0A (0.1A min.)	14.0A (0.2 A min.)	10.0A (0.6 A min.)	0.3A	2.5A
Efficiency	ACE-A615A: 68% / ACE-A615B: 85%					
Temperature	Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C					
MTBF (hrs)	100,000 hr					
Output Connector	ACE-A615A	20-pin ATX, 4-pin 12V CPU, FDD, 3 x HDD				
	ACE-A615B	20+4-pin ATX, 4-pin 12V CPU, 1x FDD, 2 x HDD, 2 x SATA				
Dimensions	150 x 81.5 x 40.5 (mm)					

Ordering Information


Part No.	Description
ACE-A615A-RS-R11	150W AC-DC 1U flex ATX Power Supply, with PFC/ErP
ACE-A615B-RS-R10	1U flex ATX 150W Power Supply, 90~264VAC, ErP, CCL, RoHS

1U AC Input AT Type

ACE-916AP 150W 1U Type AT Power Supply



Dimensions (Unit: mm)

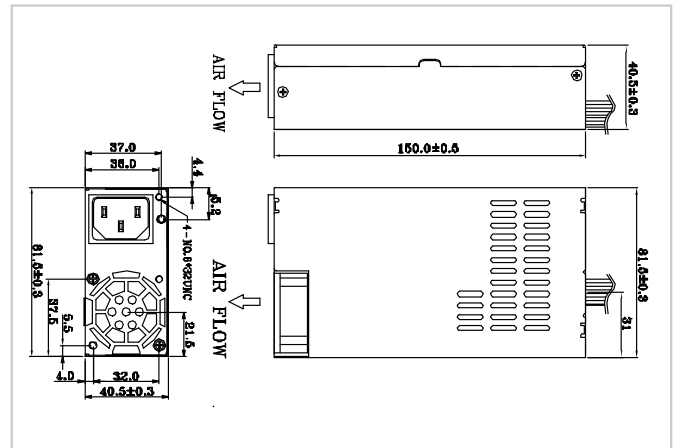

Specifications

Input Type	90 ~ 264VAC Full Range (ACE-916AP)				
Output Voltage	+5V	+12V	-5V	-12V	+24V
	16A (1A min.)	6A (0.5A min.)		0.3 A	
Efficiency	68%				
Temperature	0°C ~ 50°C (Operating), -20°C ~ 80°C (Storage)				
MTBF (hrs)	100,000				
Output Connector	P8P9, FDD, 3 x HDD				
Dimensions	150 x 81.5 x 40.5 mm				

Ordering Information

Part No.	Description
ACE-916AP-RS	150W AC-DC AT Power Supply, with PFC